

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
18 September 2003 (18.09.2003)

PCT

(10) International Publication Number
WO 03/076238 A1(51) International Patent Classification⁷: B60R 22/28, 22/34

(21) International Application Number: PCT/SE03/00408

(22) International Filing Date: 12 March 2003 (12.03.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0205793.3 12 March 2002 (12.03.2002) GB(71) Applicant (for all designated States except US): AUTO-
LIV DEVELOPMENT AB [SE/SE]; S-447 83 Vårgårda
(SE).

(72) Inventor; and


(75) Inventor/Applicant (for US only): INGEMARSSON,
Anders [SE/SE]; Karsjö, Karsjövägen 32, S-434 97
Kungsbacka (SE).(74) Agent: MEULLER, Erik; Autoliv Development AB,
S-447 83 Vårgårda (SE).(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SK, SL,
TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: A SEAT BELT ARRANGEMENT

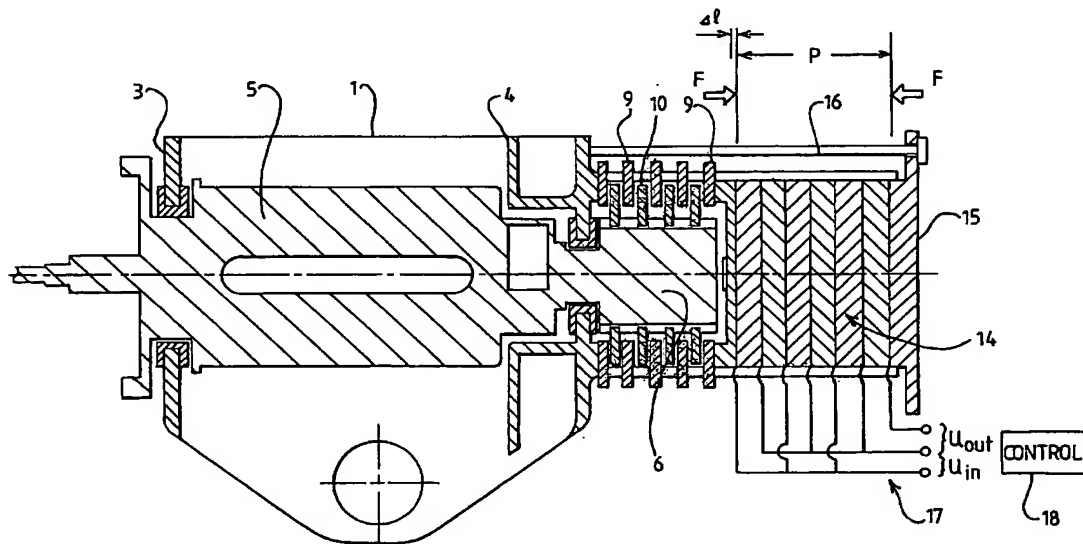

(57) Abstract: A seat-belt arrangement including an energy-absorbing force limiter. A first component, for example in the form of a retractor reel spool (5) is movable relative to a second component, for example the frame-work (1) of the retractor. The spool (5) carries with it elements (10) presenting friction faces which co-operate with further elements (9) carried by the frame (1). A stack (14) of Piezo-electric elements apply a compressional force driving together the elements having the friction faces to provide a controlled frictional energy-absorbing effect.